

ZCC26

ZOOMLION

4.0
PRODUCTS



Vision Creates Future

CONTENTS

ZCC2600	Technical Highlights	01 - 02
ZCC2600	Dimensions	03
ZCC2600	Transport dimensions and weights	04 - 07
ZCC2600	Boom combination	08
ZCC2600	Technical description	09
ZCC2600	Self assembly system	10
ZCC2600	Erecting of boom to working position	11
ZCC2600	Lifting performance	12 - 24





EFFICIENT, QUICK AND SAFETY

- The mechanism operating speed up 20%, and the speed of each mechanism don't slow down while operating 2 functions simultaneously;
- Time of erecting the whole crane is less than 6 hours;
- Omni-directional real-time LMI and monitoring system, to ensure safety operation.


CONVENIENT, COMFORTABLE AND INTELLIGENCE

- The max. Single transport weight is 30.5t, transport width is 3m;
- Omni-directional vehicle information platform, real time monitoring equipment operation, The IOT intelligent interaction system make the mobile service come true.
- Full view cabin, buttons and switches are all within reach, all-around air conditioner form a comfortable operating space.



DIMENSI NS

Basic machine with undercarriage

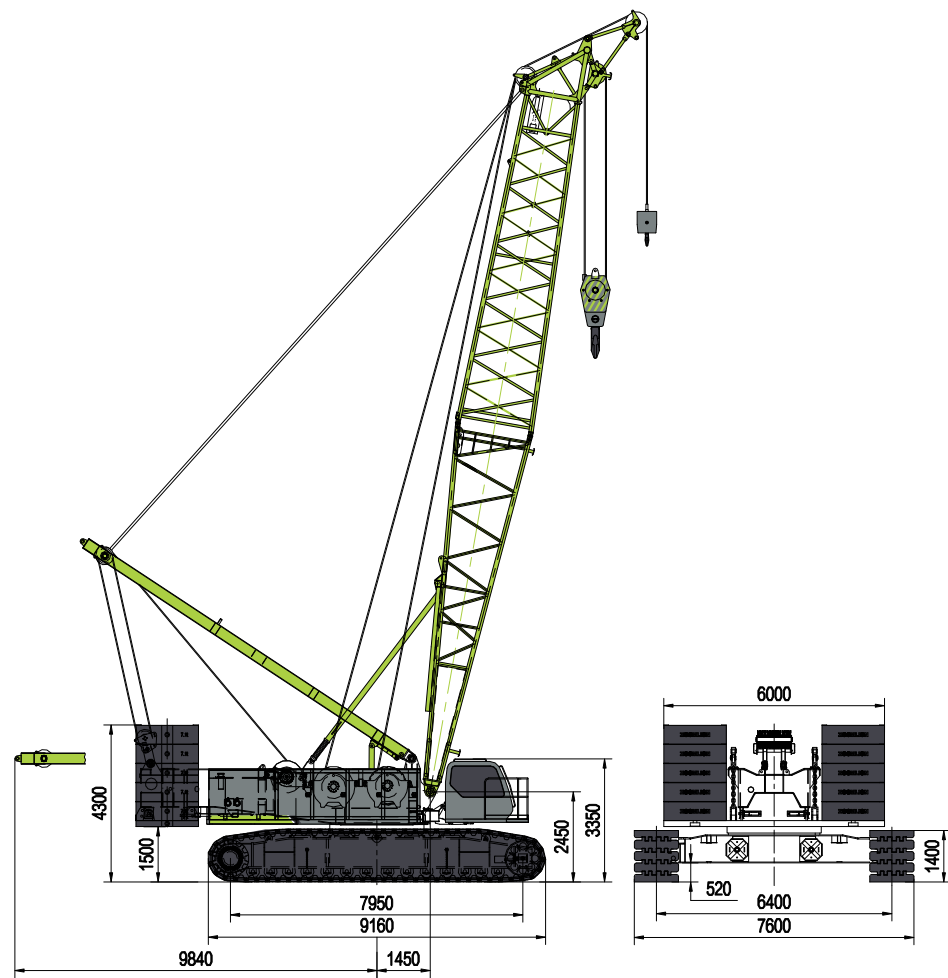

Operating weight

The operating weight includes the basic machine with crawlers, 2 main winches including wire ropes (300m and 480m) and 20m main boom, consisting of A-frame, boom foot (10m), boom head (10m), 83.7t basic counterweight, 32t carbody counterweight, and 260t hook block.


Total weight-----approx. 220t

Equipment

Main boom max. length-----83m
High reach-----95m
Luffing jib max. length-----60m
Max. combination -----main boom 62m
-----luffing jib 60m
Fixed jib -----12-30m
Auxiliary jib 25t

TRANSP RT DIMENSI NS AND WEIGHTS

Basic machine and main boom

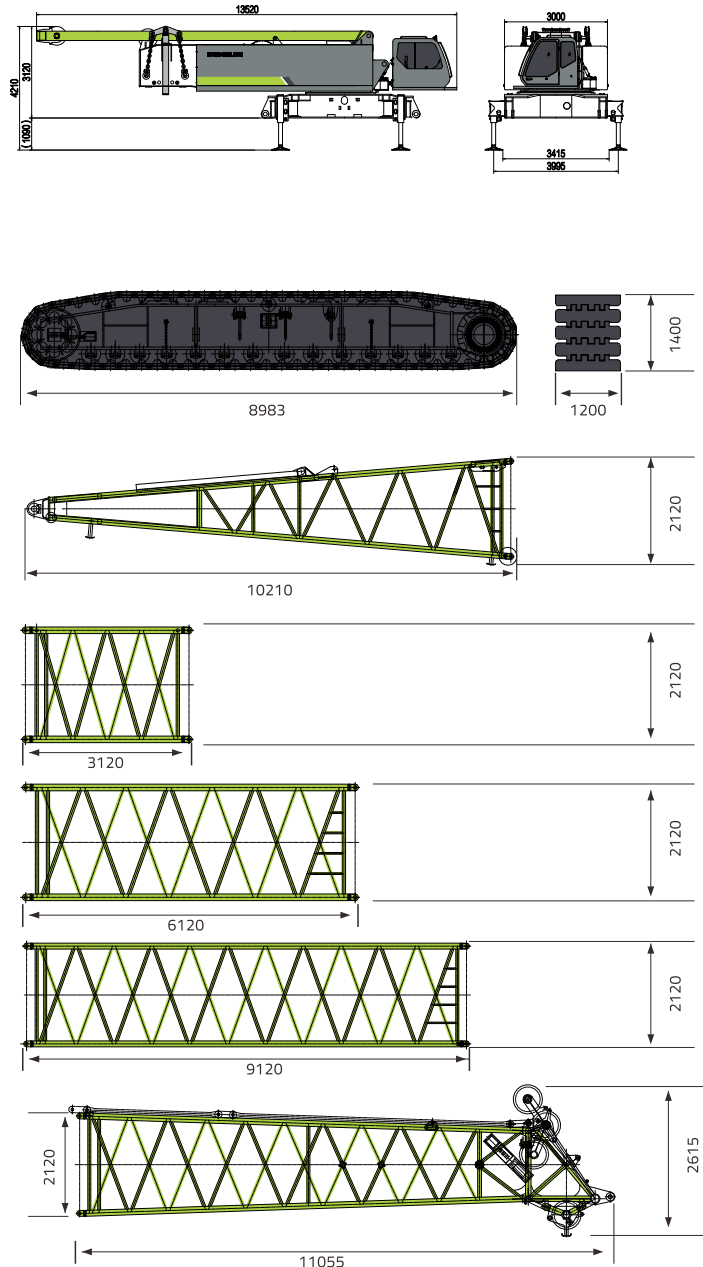

Basic machine

Width	3000mm
Weight A (Without hoisting winch, main boom tilting-back support, A-frame and main boom derricking winch)	32000kg
Weight B (Without hoisting winch and main boom tilting-back support)	37500kg
Weight C (Including hoisting winch, main boom tilting-back support, A-frame and main boom derricking winch)	45500kg

Crawler

2x

Track pads	1200mm
Width	1200mm
Weight	24500kg

Boom foot

1x

Width	2365mm
Weight	3300kg

3m boom section

1x

Width	2320mm
Weight	850kg

6m boom section

1x

Width	2320mm
Weight	1400kg

9m boom section

6x

Width	2320mm
Weight	2000kg


Boom head

1x

Width	2320mm
Weight	3500kg

TRANSP RT DIMENSI NS AND WEIGHTS

Luffing jib

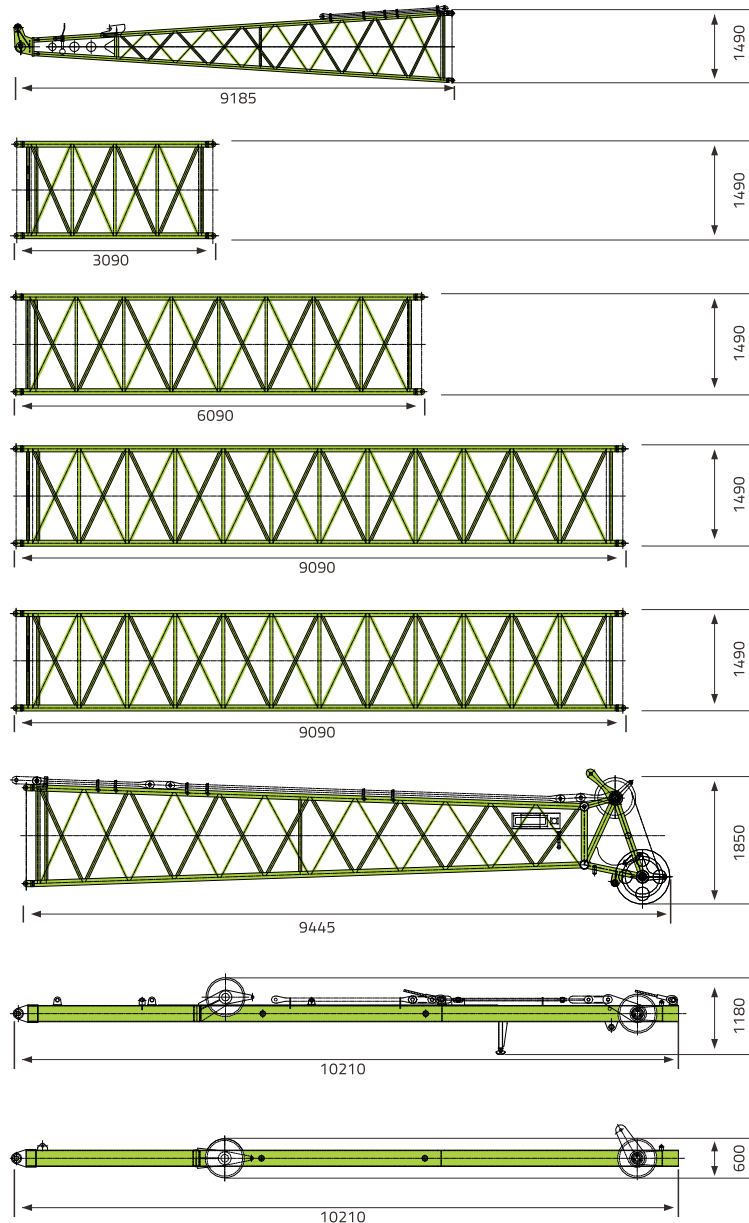

Luffing jib foot

1x

Width	1690mm
Weight	1100kg

3m luffing jib section

1x

Width	1690mm
Weight	370kg

6m luffing jib section

2x

Width	1690mm
Weight	660t

9m luffing jib section

1x

Width	1690mm
Weight	970kg

9m luffing jib section B

2x

Width	1690mm
Weight	830kg

Luffing jib head

1x

Width	1690mm
Weight	1100kg

WA-frame 2

1x



Width	1750mm
Weight	1750kg
WA-frame 1 (width: 1385 mm) – 1.63 t × 1	

WA-frame 1





1x

Width	1385mm
Weight	1630kg


TRANSP RT DIMENSIONS AND WEIGHTS

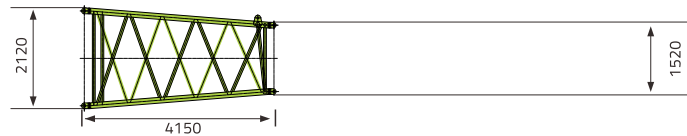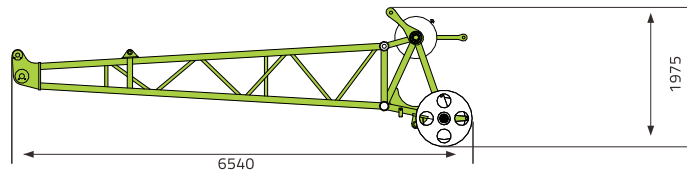

Fixed jib

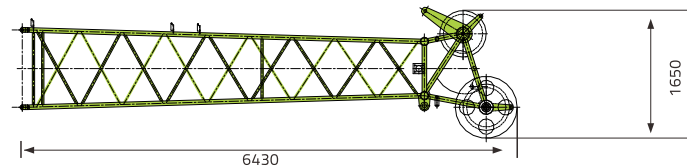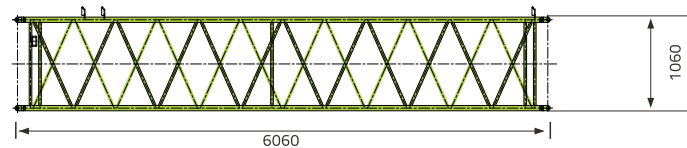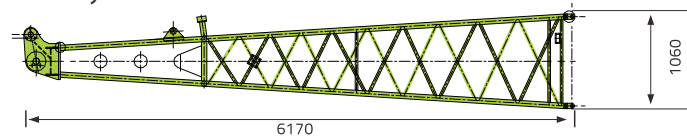

Counterweight

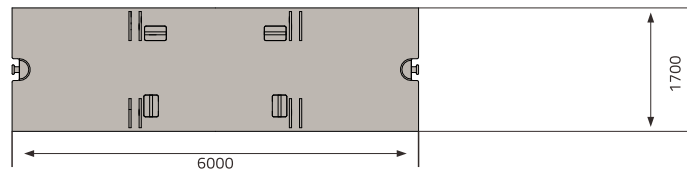

Heavy-duty fixed jib

1x

Width 1565mm

Weight 1000kg

4m L-beam section tapered

1x

Width 2320mm

Weight 1100kg

Fixed jib foot

1x

Width 1540mm

Weight 500 kg

6m fixed jib section

3x

Width 1270mm

Weight 360 kg

Fixed jib head

1x

Width 1270mm

Weight 640kg

FA-frame (width: 1500 mm) – 0.75 t × 1

FA-frame

1x

Width 1500mm

Weight 750kg

Counterweight base plate




1x

Thickness 160mm





Weight 12700kg

Counterweight plate (thickness: 510 mm) – 7.1 t × 10

TRANSPORT DIMENSIONS AND WEIGHTS

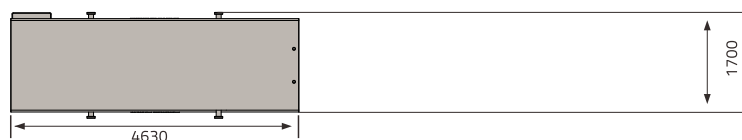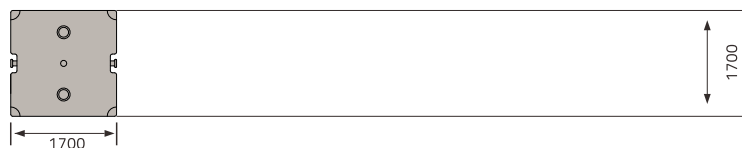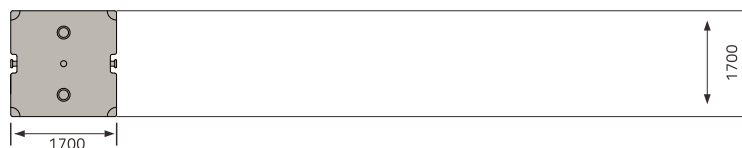

Hooks

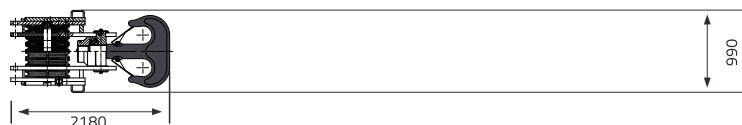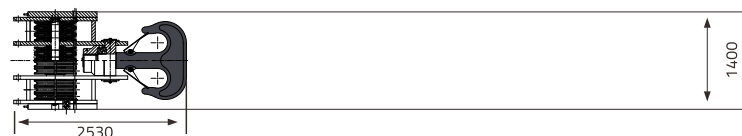

Counterweight

1 x

Thickness 510mm

Weight 710kg

Counterweight plate (thickness: 300 mm, TBM operating mode for options) – 4.0 t × 2

Counterweight for TBM operating mode

2x

Thickness 300mm

Weight 4000kg

Central counterweight (thickness: 650 mm) – 16 t × 2

Carbody counterweight

2x

Thickness 650mm

Weight 16000kg

26 t hook blocks-1 sheaves

1x

Weight 4230kg

16 t / 1 t hook blocks-6 sheaves

1x

Weight 2780kg

5 t hook blocks-2 sheaves

1x

Weight 1700kg

30 t load hook – 1.08 t × 1

3 t hook blocks-1sheave

1x

Weight 1080kg

16t single hook


1x

Weight 530kg

B M C MBINATI N

Descriptions fo Boom Assembly Codes		
Code	Type	Operation mode parameters
S	Heavy duty boom	20-83m
SL	Light dusy boom	86-95m
SW	Luffing jib	Main boom:23-62m jib:21-60m

Descriptions fo Boom Assembly Codes		
Code	Type	Operation mode parameters
SF	Fixed jib	Main boom:29-77m jib:12-30m
SFV	Heavy fixed jib	Main boom:41-77m jib:6m

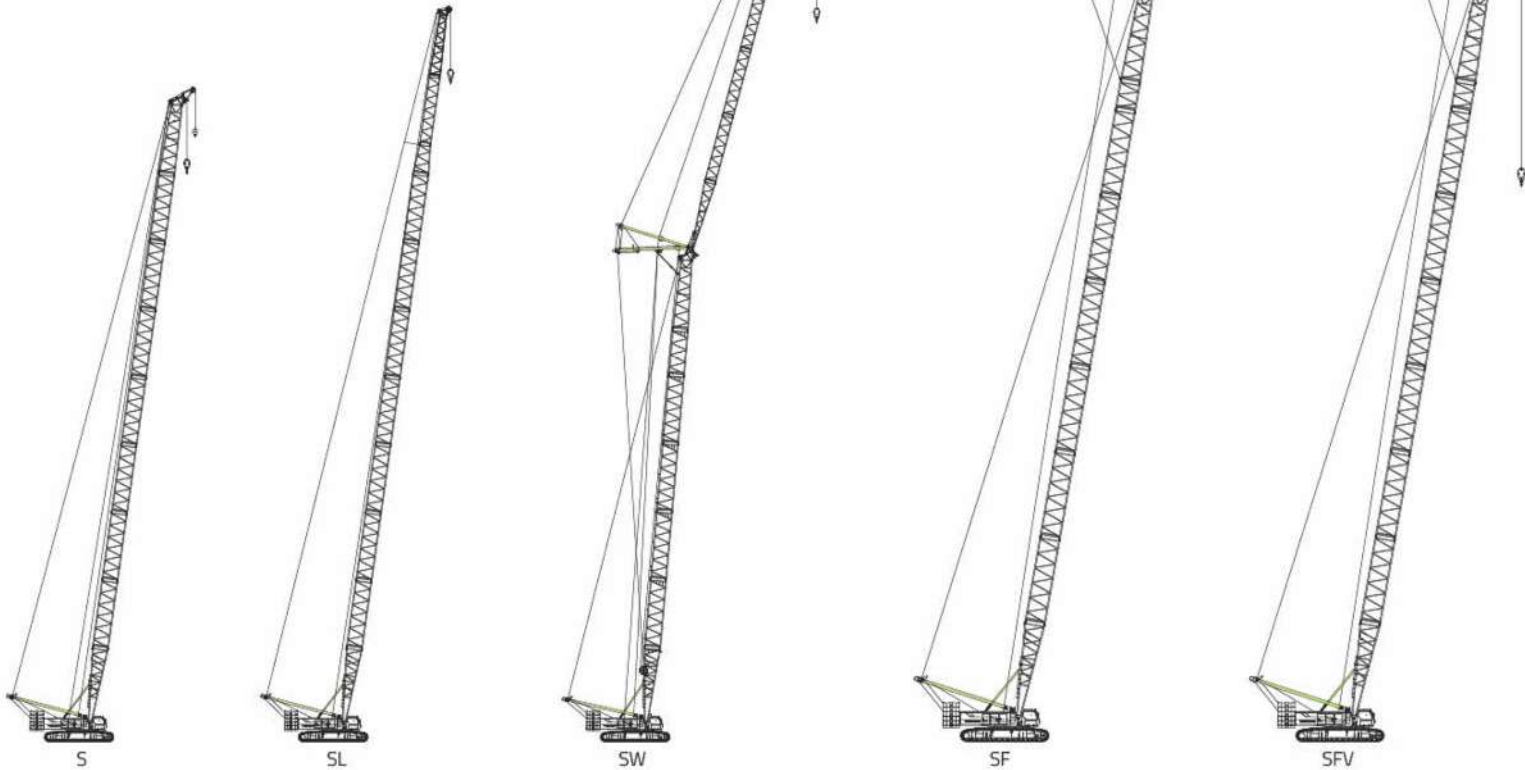

TECHNICAL DESCRIPTION



Engine

Engine type—US Cummins QSL9-C305
Rated power —227 kw/2000 rpm
Maximum output torque —1505 Nm/1400 rpm
Fuel tank h— 700 L
Exhaust emission complies with U.S. EPA Tier 3 and EU Stage III A Emission Standards.



Hydraulic system

The hydraulic system is composed of main pump, control valve, hydraulic motor, hydraulic oil tank, oil cooler and so on. World-class pump-control system and load sensing control system are applied in the hydraulic system. The main hydraulic elements are imported, which have the advantages of high efficiency, energy-saving, great reliability and long service life.
Oil cooler for hydraulic system: aluminium cooler, with the cooling fan driven by a motor
Working pressure—350bar
Hydraulic oil tank capacity— 700 L



Hoisting winch

The crane is fitted with two hoisting winches: hoisting winch 1 and hoisting winch 2. Both of them are composed of built-in axial piston variable displacement motor, balance valve, reducer, normally closed brake as well as wire rope. They are controllable independently. The hoisting rope is imported rotation-resistant wire rope.
The hoisting winches have infinitely variable speed, which greatly improves the working efficiency.

Main winch

Line pull-----max.150KN
Rope diameter-----28mm
Drum diameter-----650mm
Rope speed-----0-130m/min
Rope length-----480m

Aux.winch

Line pull-----max.136KN
Rope diameter-----28mm
Drum diameter-----650mm
Rope speed-----0-120m/min
Rope length-----300m



Boom winches

The derricking rope is imported non rotation resistant wire rope.
Line pull-----max. 102KN
Rope diameter-----24mm x2
Drum diameter-----540mm x2
Rope speed-----0-80m/min
Rope length-----440m x2



Crawler


The dual variable displacement motor and dual reducer are outfitted on the travel gear. The hydraulic motor, traveling reducer and traveling brake valve are all imported. Hydraulic chain tensioning device.
Track pads-----1200mm
Drive speed-----0-1.0km/h




Swing

The slewing mechanism consists of built-in axial piston dual variable displacement motor, dual gear reducer, normally closed slewing brake and pinion gear as well as slewing ring. The superstructure can realize 360° continuous rotation via slewing ring which is driven by the pinion gear.
The application of closed hydraulic system and controllable free swing function can reduce the impacts on the crane and ensure that the slewing movements are initiated and stopped more stably.
Swing speed-----0-1.2r/min

SELF ASSEMBLY SYSTEM

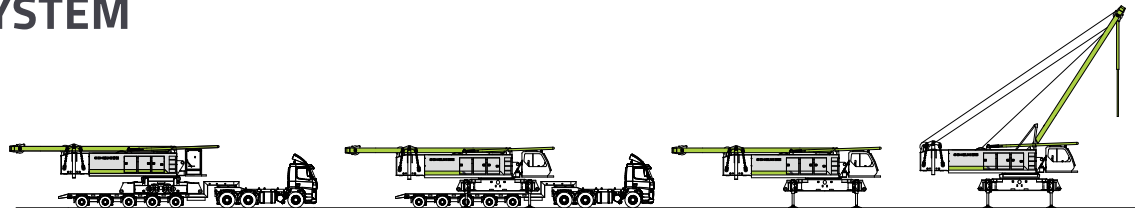


Unloading of basic machine

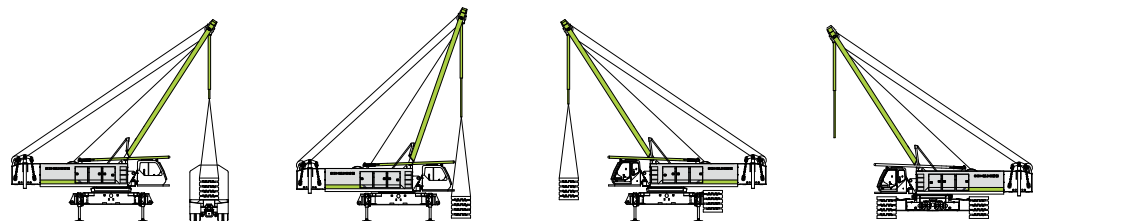


Unloading and assembly of crawler carrier



Unloading and assembly of central counterweight



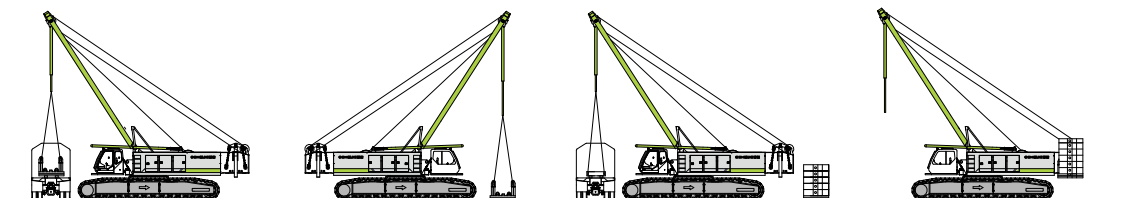


Unloading and assembly of rear counterweight

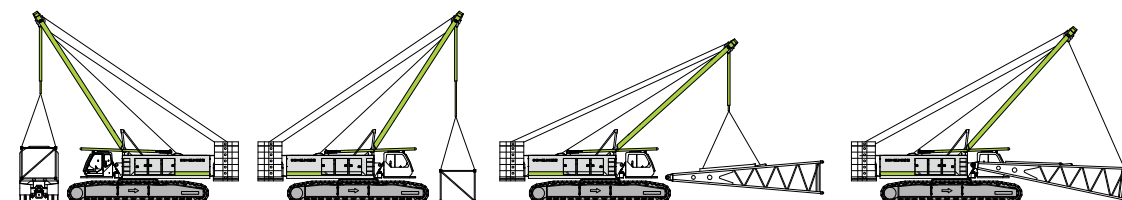


Unloading and assembly of frame

ERECTING FB MT WORKING POSITION

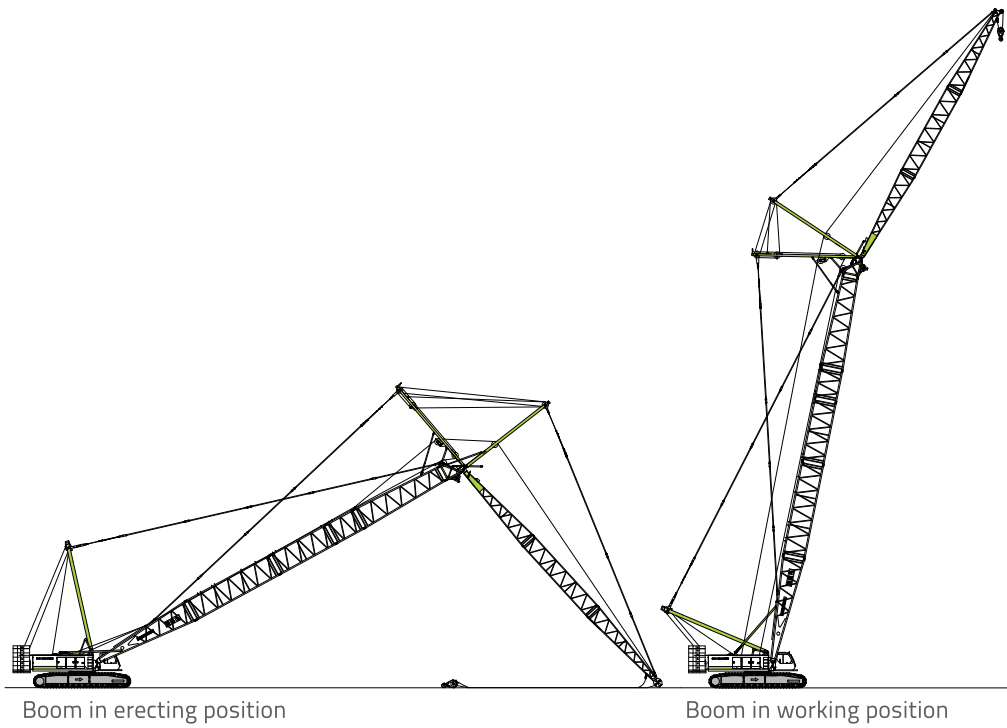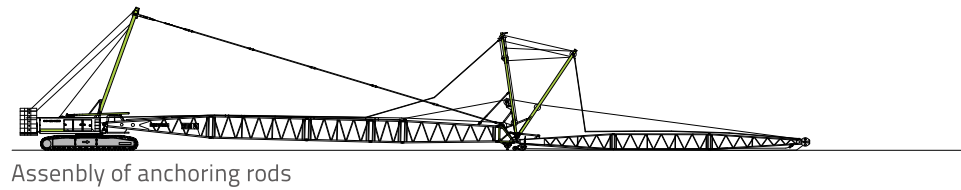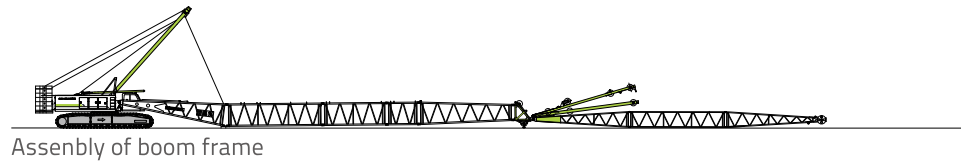

LIFTING PERFORMANCE

Lifting performance on S/SL boom

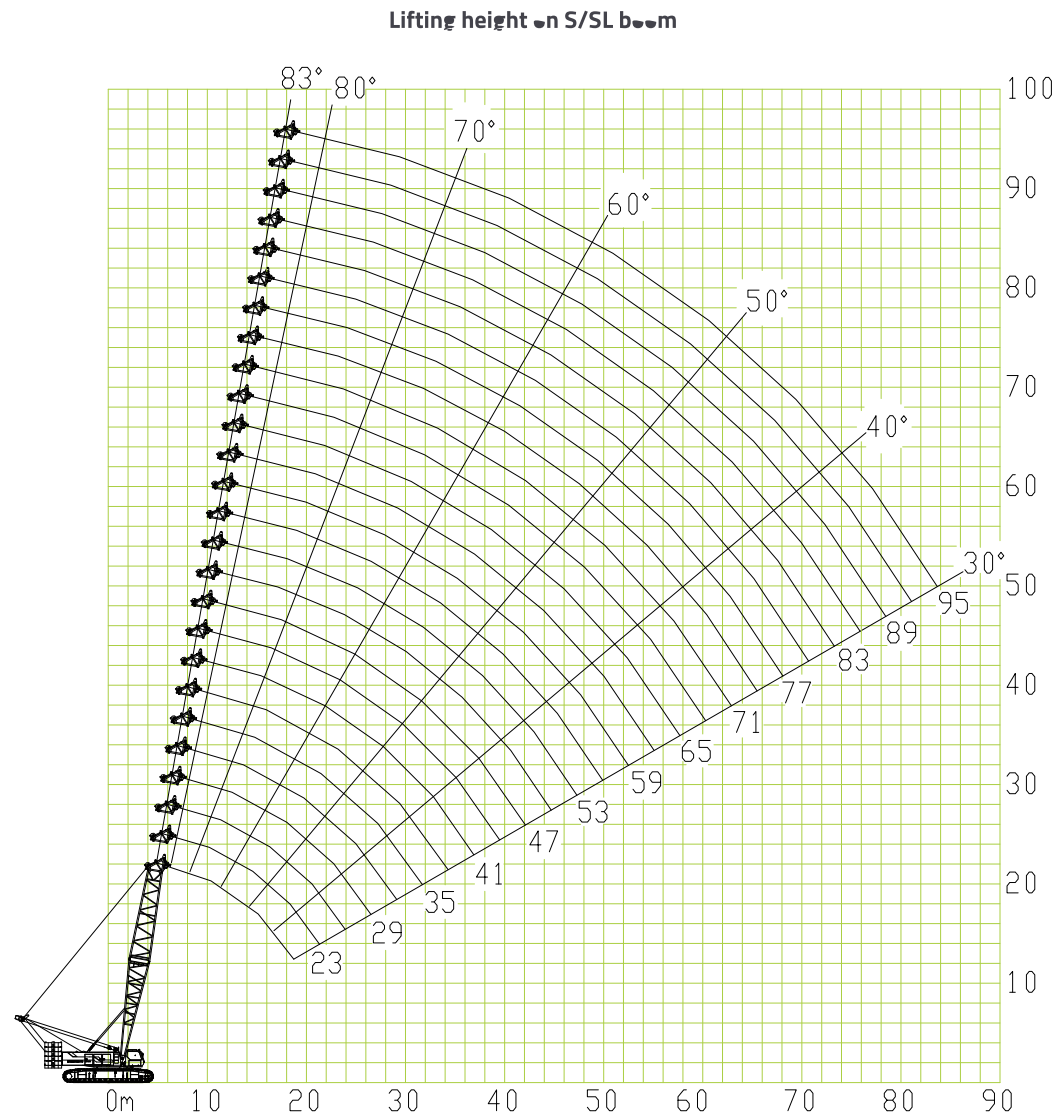

LIFTING PERFORMANCE

S-boom length (m)	Lifting capacity on S boom										
	20	23	26	29	32	35	38	41	44	47	50
Radius											
5	260										
6	227	200.8	193.1	184							
7	190.7	190.5	189	174	163	161					
8	175	166.6	164.5	162.5	158.4	149	149	135	118		
9	134.6	134.5	134.5	134.3	134.3	134.2	134.1	124	112	112	
10	132	130	128	125.9	123.9	121.9	121.9	119.8	110	110	102
12	102.9	102.7	102.5	102.2	102	101.6	99.5	97.5	97.5	95.5	93.4
14	83	83	82.8	82.6	82.5	82.2	82.1	82	81.3	81.3	79.2
16	69.1	69	68.8	68.7	68.7	68.5	68.5	68.4	68.4	68.3	68.3
18	59.1	59	58.9	58.7	58.6	58.6	58.6	58.6	58.6	58.6	58.5
20		51.5	51.4	51.4	51.4	51.4	51.4	51.2	51.1	51	50.8
22			45.6	45.6	45.5	45.5	45.4	45.3	45.1	45	44.8
24			40.7	40.7	40.7	40.6	40.4	40.3	40.2	40.1	39.9
26				36.6	36.6	36.6	36.5	36.4	36.2	36.1	35.9
28					33.2	33.2	33.1	32.9	32.8	32.7	32.6
30						30.3	30.3	30.2	30	29.9	29.6
32						27.9	27.7	27.6	27.5	27.4	27.2
34							25.6	25.5	25.3	25.2	24.9
36								23.5	23.4	23	22.8
38									21.7	21.4	21.1
40									20	19.8	19.4
42										18.3	18
44											16.7

S-boom length (m)	Lifting capacity on S boom										
	53	56	59	62	65	68	71	74	77	80	83
Radius											
10	98	86									
12	93.4	85	83	80	70	68	60.9	55.4	50.3		
14	79.2	77.2	77.2	70	69	66.5	59.2	53.8	49	43.2	39.4
16	67	67	67	65	65	64	57.4	52.2	47.4	41.9	38
18	58.3	58.2	58	57.2	56.6	55.9	54.8	50.4	44.7	40.6	36.8
20	50.7	50.5	50.3	50.2	49.4	48.9	48.4	47.7	43.4	39.4	35.8
22	44.6	44.5	44.4	44.1	43.8	43.3	42.7	42.1	41.5	38.1	34.5
24	39.8	39.5	39.4	39.3	39.1	38.5	38	37.4	37	36.5	33.4
26	35.7	35.6	35.4	35.2	34.8	34.5	34.2	33.6	33.2	32.6	32.1
28	32.4	32.2	31.8	31.5	31.2	30.8	30.5	30.1	29.7	29.3	28.9
30	29.5	29.2	28.8	28.4	28.1	27.8	27.3	27	26.7	26.3	25.9
32	26.5	26.5	26.1	25.8	25.3	25	24.6	24.4	23.9	23.6	23.3
34	24.5	24.2	23.8	23.5	23	22.7	22.4	21.9	21.6	21.3	21
36	22.5	22.1	21.7	21.4	21.1	20.6	20.3	20	19.6	19.2	18.9
38	20.5	20.3	20	19.5	19.2	18.9	18.5	18.1	17.8	17.4	17.1
40	19	18.7	18.3	18	17.7	17.2	16.9	16.6	16.1	15.8	15.5
42	17.6	17.2	16.9	16.6	16.1	15.8	15.5	15	14.7	14.4	14
44	16.3	15.9	15.6	15.2	14.8	14.5	14.1	13.8	13.4	13.1	13
46	15.1	14.8	14.4	14	13.7	13.3	12.9	12.6	12.4	12.2	12
48		13.7	13.4	12.9	12.6	12.3	11.8	11.7	11.5	11.3	11
50		12.7	12.4	11.9	11.6	11.3	11	10.9	10.7	10.5	10
52			11.4	11.1	10.7	10.3	10.3	10.1	9.9	9.7	9.3
54				10.2	9.9	9.5	9.1	9.4	9.2	8.9	8.5
56					9.1	8.9	8.8	8.7	8.5	8.2	8.2
58					8.4	8	8.3	8.1	7.9	7.6	7.3
60						7.4	7.7	7.5	7.3	7	6.6
62							7.2	7	6.8	6.5	6.2
64								6.5	6.3	6	5.6
66								5.7	5.8	5.5	5.1
68									5.2	5.1	4.6
70										4.7	4.5
72											3.8


NOTE:

When tip boom is used, the lifting capacity on tip boom is the same as that on heavy duty boom at the same radius, but its max. lifting capacity should not exceed 25 t.

LIFTING PERFORMANCE

SL-boom length (m)	Lifting capacity on SL boom			
	86	89	92	95
Radius				
16	30.9/16.3	28.1/16.9	25.3/17.4	
18	30	27.3	24.9	21
20	29.9	25.9	24	20.4
22	27.9	24.6	22.8	19.7
24	27	23.9	21.7	19
26	26.1	23	20.6	18
28	25.2	22	19.8	17
30	23.1	21	19.2	16
32	21.2	20.3	18.3	15.8
34	19.4	18.6	17.7	14.4
36	17.8	17.1	16.5	13
38	16.3	15.7	15.7	11.9
40	14.9	14.6	14.5	10.8
42	13.8	13.5	13.4	9.8
44	12.7	12.4	12.3	9
46	11.7	11.5	11.4	8.2
48	10.8	10.5	10.4	7.4
50	9.9	9.6	9.5	6.7
52	9.1	8.8	8.7	6
54	8.4	8.1	8	5.3
56	7.7	7.4	7.3	4.8
58	7.1	6.7	6.6	4.3
60	6.5	6.1	6	3.8
62	5.9	5.6	5.5	3.3
64	5.4	5.1	5	2.9
66	5	4.6	4.5	2.7
68	4.5	4	3.9	2.6
70	4.1	3.4	2.8	2.5
72	3.7	2.8	2.7	2.4
74	3.4	2.7	2.6	2.3
76		2.6	2.5	2.3
78		2.5	2.4	2.2
80			2.2	2.1
82				2

Lifting performance on SF boom

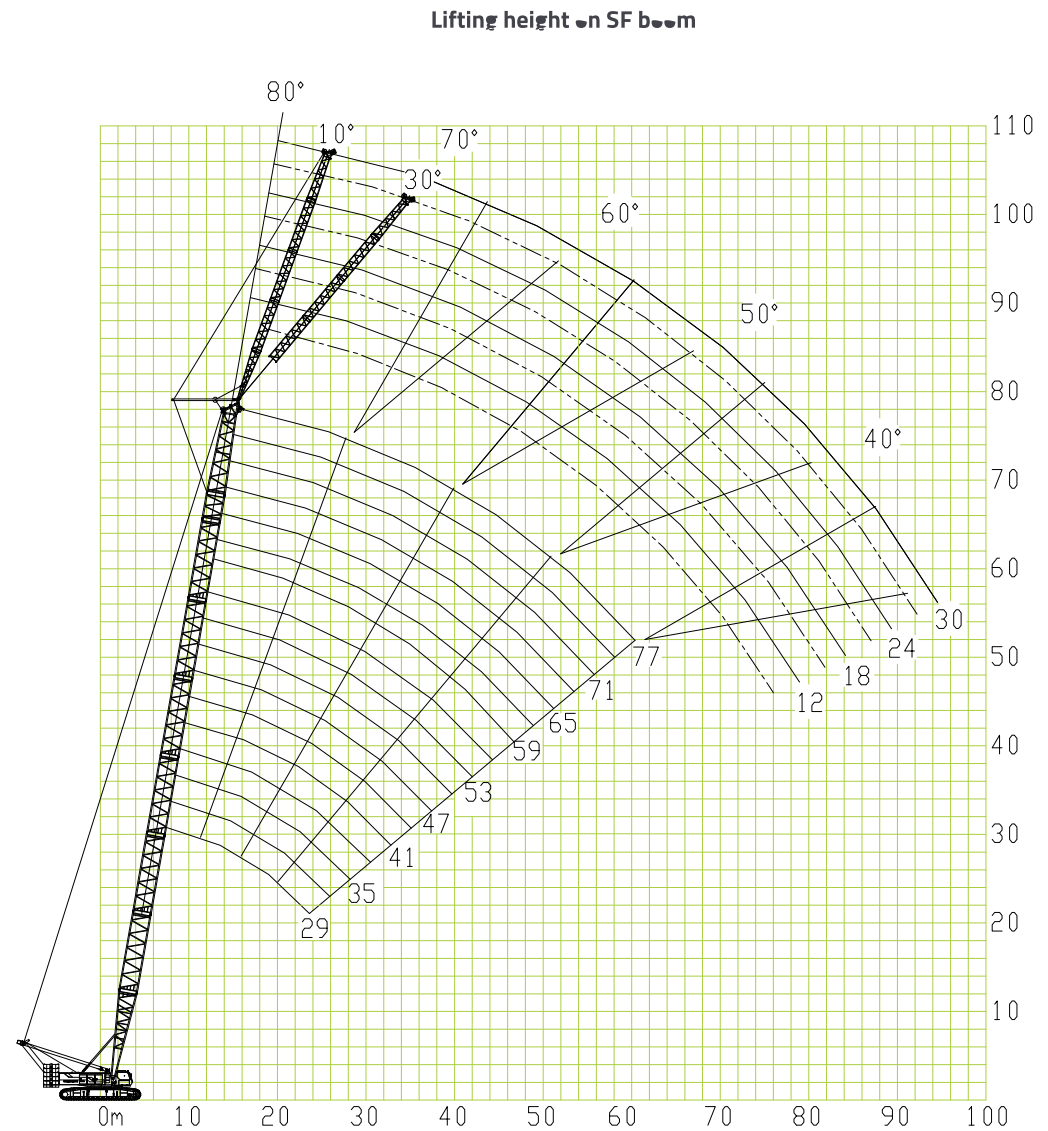

LIFTING PERFORMANCE

F-jib angle (°)	10.0	30.0	10.0	30.0	10.0	30.0	10.0	30.0
S-boom length (m)	29.0							
F-jib length (m)	12.0		18.0		24.0		30.0	
Radius								
10	34/10.5							
12	33.0							
14	32.5		27.0					
16	32.0	28.8	26.8		18.2			
18	31.3	26.8	25.7	20.5	18.1		13.0	
20	30.7	25.6	24.9	20.1	17.8		12.9	
22	30.0	24.5	24.2	19.1	17.3	14.1	12.6	
24	29.0	23.4	23.4	18.3	16.9	14.0	12.5	
26	28.0	22.4	22.8	17.5	16.6	13.9	12.3	10.0
28	27.0	21.6	22.1	16.8	16.2	13.6	12.0	9.9
30	25.5	20.9	21.2	16.2	15.9	13.0	11.7	9.8
32	24.0	20.2	20.7	15.6	15.5	12.5	11.5	9.6
34	22.6	19.6	20.0	15.0	15.2	12.0	11.2	9.4
36	21.7	19.2	18.9	14.6	14.9	11.6	10.9	9.2
38		18.8	18.0	14.1	14.7	11.1	10.6	9.0
40			17.1	13.6	14.1	10.8	10.4	8.7
42			16.1	13.2	13.8	10.5	10.2	8.4
44				12.9	13.5	10.1	10.0	8.2
46					13.0	9.8	9.8	8.0
48					12.2	9.6	9.5	7.8
50						9.0	9.4	7.5
52							9.2	7.4
54							9.1	7.2
56								7.2

F-jib angle (°)	10.0	30.0	10.0	30.0	10.0	30.0	10.0	30.0
S-boom length (m)	38.0							
F-jib length (m)	12.0		18.0		24.0		30.0	
Radius								
14	32.5							
16	32.0	28.5	26.0					
18	31.3	28.1	24.9		17.8			
20	30.7	26.9	24.2	19.8	17.5		12.8	
22	30.0	25.9	23.5	19.5	17.1		12.5	
24	29.0	24.8	22.7	19.2	16.6	14.0	12.3	
26	28.0	23.9	22.2	18.4	16.3	13.9	12.0	
28	27.0	23.0	21.4	17.7	15.9	13.7	11.7	9.7
30	25.5	22.2	20.6	17.1	15.6	13.5	11.3	9.6
32	24.0	21.5	20.1	16.5	15.3	13.2	11.1	9.4
34	22.6	20.8	19.4	15.9	14.9	12.7	10.8	9.3
36	21.7	20.3	18.3	15.4	14.6	12.3	10.6	9.1
38	20.9	19.5	17.5	14.9	14.4	11.8	10.3	8.9
40	19.4	18.6	16.6	14.3	13.9	11.4	10.1	8.8
42	18.3	17.4	15.7	13.7	13.6	11.1	9.9	8.6
44	17.1	16.5	14.9	12.8	13.3	10.7	9.7	8.6
46		15.7	14.4	12.1	12.8	10.4	9.5	8.3
48			13.9	11.6	12.0	10.1	9.3	8.1
50			13.4	10.8	11.3	9.8	9.2	7.9
52				10.3	10.7	9.5	8.9	7.7
54					10.1	9.2	8.8	7.5
56					9.6	9.1	8.6	7.4
58						8.7	8.3	7.2
60							8.2	7.1
62							8.0	7.0
64								7.0

LIFTING PERFORMANCE

F-jib angle (°)	10.0	30.0	10.0	30.0	10.0	30.0	10.0	30.0
S-boom length (m)	47.0							
F-jib length (m)	12.0		18.0		24.0		30.0	
Radius								
14	32.5							
16	32.0		25.2					
18	31.3	27.5	24.2		17.3			
20	30.7	27.1	23.5		17.0		12.4	
22	30.0	26.9	22.8	19.2	16.6		12.1	
24	29.0	26.0	22.0	18.9	16.2		11.9	
26	28.0	25.0	21.5	18.7	15.9	13.7	11.6	
28	27.0	24.2	20.8	18.3	15.5	13.5	11.3	
30	25.5	23.1	20.0	17.9	15.2	13.3	11.0	9.3
32	24.0	22.2	19.5	17.3	14.8	13.1	10.8	9.1
34	22.3	21.3	18.8	16.8	14.5	12.8	10.5	9.0
36	21.4	20.5	17.8	16.2	14.2	12.5	10.3	8.8
38	20.5	19.1	17.0	15.7	14.0	12.0	10.0	8.7
40	19.1	18.2	16.1	15.2	13.5	11.7	9.8	8.6
42	17.8	17.1	15.2	14.2	13.2	11.5	9.6	8.4
44	16.6	16.2	14.5	13.3	12.9	11.0	9.4	8.4
46	15.4	15.4	14.0	12.4	12.4	10.6	9.2	8.2
48	14.4	14.6	13.5	11.7	11.6	10.2	9.0	8.1
50	13.5	13.7	13.0	11.3	11.0	9.8	8.9	7.9
52	12.6	12.8	12.5	10.5	10.4	9.5	8.7	7.8
54		12.0	12.0	10.0	9.8	9.1	8.6	7.7
56			11.6	9.2	9.3	9.0	8.3	7.6
58			10.8	9.0	8.8	8.6	8.1	7.5
60				8.0	8.4	8.3	8.0	7.4
62					8.0	8.0	7.8	7.2
64					7.5	7.5	7.5	7.1
66						7.0	7.3	7.0
68							7.0	6.9
70							6.8	6.4
72								5.6

F-jib angle (°)	10.0	30.0	10.0	30.0	10.0	30.0	10.0	30.0
S-boom length (m)	56.0							
F-jib length (m)	12.0		18.0		24.0		30.0	
Radius								
16	32.0							
18	31.5		25.1					
20	30.9	27.0	24.2		16.8			
22	30.4	26.6	23.4		16.6		12.1	
24	28.3	26.5	22.7	18.9	16.4		12	
26	27.0	26.0	22.0	18.7	16.1		11.8	
28	26.3	23.5	21.4	18.6	15.8	13.5	11.5	
30	25.6	21.4	20.8	18.3	15.5	13.4	11.3	
32	24.8	19.5	20.2	18.1	15.2	13.2	11	9.2
34	23.5	18.6	19.7	17.8	15	13.1	10.8	9.1
36	21.6	18.1	19.2	17.1	14.7	12.9	10.5	8.9
38	19.9	17.6	18.7	15.8	14.4	12.8	10.3	8.8
40	18.4	17.2	17.9	14.7	14.2	12.6	10.2	8.6
42	17	16.8	17.0	13.7	13.5	12.4	9.9	8.6
44	15.8	16.2	16.2	12.7	12.6	12.1	9.7	8.4
46	14.7	15.1	15.1	12.5	11.8	11.9	9.5	8.3
48	13.7	14.0	14	12.1	11.1	11.4	9.3	8.3
50	12.7	13.0	13.1	11.9	10.4	10.8	9.2	8.1
52	11.9	12.1	12.2	11.6	9.8	10.2	9	8
54	11.1	11.3	11.4	11.4	9.2	9.6	8.9	7.8
56	10.4	10.6	10.7	11.1	9.0	9.0	8.7	7.7
58	9.7	9.9	10	10.4	8.8	8.6	8.4	7.7
60	9.1	9.2	9.4	9.7	8.6	8.0	8	7.5
62			8.8	9.1	8.5	7.6	7.5	7.4
64			8.3	8.5	8.3	7.3	7.1	7.4
66			7.7	7.9	8	7.2	6.8	7.1
68					7.5	7.1	6.5	6.7
70					7	7.0	6	6.4
72					6.6	6.5	5.5	6
74							5	5.6
76							4.4	5
78							3.6	4.4


LIFTING PERFORMANCE

F-jib angle (°)	10.0	30.0	10.0	30.0	10.0	30.0	10.0	30.0
S-boom length (m)	71.0							
F-jib length (m)	12.0		18.0		24.0		30.0	
Radius								
18	32.0							
20	31.8		25.3					
22	30.4	27.0	24.5		17.7			
24	27.5	26.5	23.8		17.1			
26	27.0	25.3	23.2	18.9	16.7		12.1	
28	26.3	22.9	22.5	18.7	16.1		12	
30	25.8	21.1	21.8	18.6	15.6	13.5	11.7	
32	24.5	20.5	21.0	18.5	15.3	13.4	11.5	
34	22.3	19.9	19.8	17.9	15.5	13.3	11.3	9.2
36	20.4	19.4	19.2	16.5	16.2	13.2	11.1	9.1
38	18.7	19.0	18.8	15.2	16.5	13.1	10.8	9
40	17.2	17.8	17.6	14.4	16.2	12.9	10.7	8.9
42	15.8	16.4	16.2	14.0	16	12.9	10.5	8.8
44	14.6	15.1	15	13.7	15.3	12.6	10.3	8.6
46	13.4	14.0	13.8	13.4	14.2	11.7	10.1	8.6
48	12.4	12.9	12.8	13.1	13.1	10.9	9.9	8.5
50	11.5	11.9	11.9	12.6	12.2	10.2	9.8	8.4
52	10.6	11.0	11	11.7	11.3	9.5	9.2	8.3
54	9.8	10.2	10.2	10.8	10.5	8.9	8.6	8.3
56	9.1	9.5	9.5	10.0	9.8	8.4	8.1	8.1
58	8.4	8.8	8.8	9.3	9.1	7.9	7.7	8
60	7.8	8.1	8.2	8.6	8.4	7.7	7.2	7.7
62	7.2	7.5	7.6	8.0	7.8	7.6	6.8	7.3
64	6.7	6.9	7	7.4	7.2	7.6	6.4	6.8
66	6.1	6.4	6.4	6.8	6.6	7.4	6	6.5
68	5.6	5.8	5.8	6.2	6	7.3	5.6	6.1
70	5	5.2	5.3	5.6	5.5	6.7	5.3	5.7
72	4.6	4.7	4.8	5.1	5	6.2	5	5.4
74	4.3	4.3	4.4	4.6	4.6	5.8	4.7	5.1
76			4.1	4.3	4.3	5.3	4.4	4.8
78			3.9	4.0	4	4.9	4.1	4.4
80				3.7	3.8	4.4	3.8	4.2
82					3.5	4.1	3.6	3.9
84					3.3	3.7	3.3	3.7
86						3.4		3.5
88								3.2

F-jib angle (°)	10.0	30.0	10.0	30.0	10.0	30.0	10.0	30.0
S-boom length (m)	77.0							
F-jib length (m)	12.0		18.0		24.0		30.0	
Radius								
20	32.0							
22	31.8		25.0					
24	30.4	22.7	24.2		14.3			
26	27.5	22.4	23.6		13.9		8.3	
28	27.0	22.1	23.0	16.2	13.6		8.0	
30	26.0	21.6	22.4	16.1	13.3		7.8	
32	23.9	21.0	22.0	15.8	13.0	9.5	7.5	
34	21.8	20.4	21.5	15.7	12.7	9.4	7.4	
36	19.9	19.9	20.4	15.5	12.4	9.2	7.1	6.9
38	18.2	19.4	18.6	15.2	12.1	9.0	6.7	6.8
40	16.7	17.9	17.1	14.8	11.9	8.9	6.5	6.7
42	15.3	16.3	15.7	14.4	11.6	8.8	6.4	6.7
44	14.1	15.0	14.5	14.0	11.4	8.6	6.1	6.5
46	12.9	13.8	13.3	13.8	11.2	8.5	6.0	6.5
48	11.9	12.6	12.3	13.4	10.9	8.4	5.9	6.4
50	11	11.6	11.4	12.2	10.7	8.3	5.8	6.3
52	10.1	10.7	10.5	11.2	10.4	8.2	5.5	6.3
54	9.3	9.8	9.7	10.4	10	8.0	5.4	6.2
56	8.6	9.0	9	9.6	9.2	8.0	5.3	6.1
58	7.9	8.3	8.3	8.9	8.4	7.9	5.2	6.1
60	7.3	7.6	7.6	8.1	7.7	7.8	5.0	6.1
62	6.7	7.0	6.9	7.5	7.1	7.7	4.9	5.6
64	6	6.4	6.3	6.8	6.5	7.7	4.8	5.1
66	5.5	5.8	5.7	6.2	5.9	7.3	4.7	4.7
68	4.9	5.2	5.1	5.6	5.3	6.8	4.6	4.3
70	4.5	4.7	4.6	5.0	4.8	6.2	4.6	3.9
72	4.2	4.2	4.3	4.6	4.4	5.8	4.4	3.5
74	3.9	3.8	4	4.3	4.2	5.3	4.3	3.4
76	3.6	3.4	3.7	4.0	3.9	4.8	4.2	3.4
78	3.3	3.0	3.4	3.7	3.6	4.4	4.2	3.4
80		2.6	3.0	3.2	3.4	4.0	4.0	3.2
82			2.6	2.9	3.1	3.6	3.6	3.2
84			2.3	2.5	2.8	3.2	3.2	3.2
86				2.2	2.5	2.9	3.0	3.2
88					2.2	2.5	2.6	3.1
90					2.0	2.2	2.4	2.8
92						1.9	2.0	2.4

LIFTING PERFORMANCE

Lifting height on SW boom

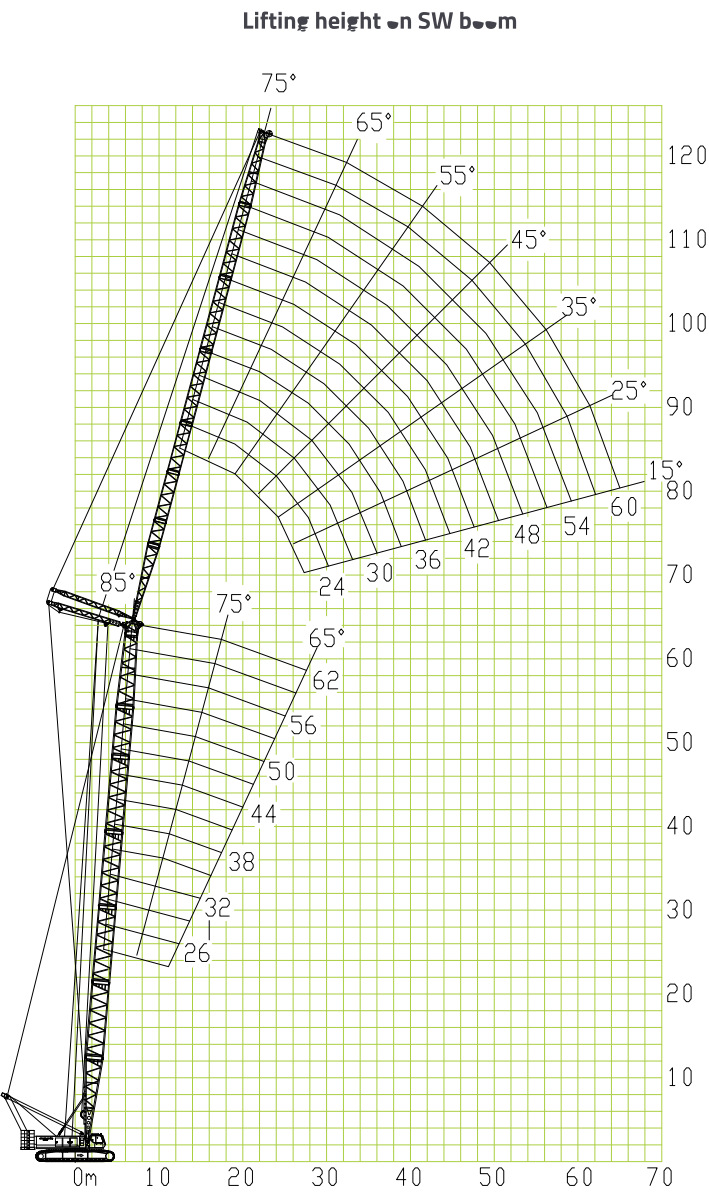

S-boom length(m)	29																	
W-jib length(m)	27			33			39			45			51			60		
S-boom angle	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°
Radius(m)																		
14	68.1			57.3														
16	62.5			54			41.9											
18	57.2			50.3			40.8			31.2								
20	53.3			47			39.7			29.8			22.3					
22	48.8			43.9			38.3			29.1			21.7			12		
24	44.1	42.1		40.9			37			28.6			21.1			11.4		
26	40	38.4		37.9	38		35.4			27.5			20.5			11		
28	33.1	35.1		34.3	34.9		33.6	32.5		26.9			20.1			10.7		
30	25.6	32.3		31.4	32.1		30.8	32		26.3			19.6			10.3		
32		29.9	27.3	28.9	29.8		27.2	29.6		24.8	27		19.1	16.7		10		
34		27.9	25.3	25.6	27.7		25.1	26.9		22.8	26.4		18.6	16.5		9.7		
36		26	23.6	20.6	25.9	23	23.3	24.9		21.1	24.5		18.3	16.3		9.4		
38			22.1		24.3	21.5	21.7	23.3	19.6	19.6	22.8		17.2	15.8		9.1	9.8	
40			20.7		22.9	20.2	20	21.8	19.5	18.5	21.3		16	15.4		8.9	9.4	
42						18.9	16.3	20.4	18.4	17.4	20	17	15	15		8.6	9.2	
44						17.7		19.3	17.2	16.5	18.7	16.7	14.1	14.7		8.4	8.9	
46						16.8		18.2	16.3	15.9	17.7	15.8	12.1	14.2	14.5	8.1	8.6	
48									15.3	13.1	16.7	14.8	11.3	12.8	14.3	7.7	8.4	
50									14.5		15.7	14	10.8	12.3	13.4	7.4	8.2	8.6
52											15	13.2	10.2	11.7	12.7	6.9	7.9	8.4
54												12.5	10	11.1	12.1	6.6	7.6	8.2
56												11.9		10.6	11.3	6.3	7.1	7.9
58												11.3		10.1	10.8	6.1	6.8	7.6
60															10.3	5.7	6.5	7.2
62																9.8	5.5	6.2
64																	9.2	5.9
66																		5.6
68																		
70																		5.6

LIFTING PERFORMANCE

S-boom length(m)	41																							
W-jib length(m)	27				33				39				45				51				60			
S-boom angle	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°
Radius(m)																								
12																								
14																								
16	62.5			55.6																				
18	55.6			52.2			41.4			31.7														
20	50			48.7			40.3			30.8			22.6											
22	45.6			45			39			29.4			22											
24	41.6			40.9			37.7			28.9			21.4			11.7								
26	38.1	32.5		37.5			36.4			27.8			20.8			11.2								
28	35.3	32.2		34.7	29.2		34.1			27.2			20.3			10.9								
30	30.9	29.7		32.2	29		31.6			26.6			19.8			10.6								
32		27.4		30	27.8		29.5	26.3		26			19.3			10.2								
34		25.5		27	25		26.3	24.5		23.7	23.1		18.9			9.8								
36		23.7	20.2	24.4	23.2		24.4	22.7		22	22.2		18.5	19.5		9.5								
38		22.3	20		21.7		22.7	21.2		20.4	20.7		17.9	19.3		9.2								
40			18.7		20.4	18.2	21.2	19.8		19	19.3		16.6	18.8		9	9.5							
42			17.6		19.1	18	19.6	18.7		18	18.2		15.5	17.6		8.8	9.3							
44			16.6		18.1	17		17.5	14.8	17	17.1		14.5	16.6		8.6	9							
46						16.1		16.6	14.6	16.1	16.1		12.5	15.6		8.4	8.8							
48						15.1		15.6	13.8	15.4	15.2	13.2	11.7	14.7		7.9	8.5							
50						14.3		14.8	13		14.4	12.5	11.1	13.9	11.5	7.6	8.3							
52						13.5			12.4		13.7	11.9	10.5	13.1	11.3	7.2	8.1							
54								11.8		12.9	11.2	10	12.5	10.7	6.8	7.9								
56								11.1				10.6	11.8	10.1	6.5	7.6	8.2							
58											10.1		11.2	9.6	6.2	7.1	8.1							
60											9.6		10.6	9.1	5.9	6.8	7.8							
62											9.1			8.6	5.6	6.5	7.4							
64														8.2		6.2	7							
66														7.8		5.9	6.7							
68														7.5		5.7	6.3							
70																5.5	6							
72																							5.7	
74																							5.4	
76																							5.4	

S-boom length(m)	47																							
W-jib length(m)	27				33				39				45				51				60			
S-boom angle	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°
Radius(m)																								
14	58.8																							
16	52.5			51.3																				
18	46.9			46.1			41.6																	
20	42.8			41.9			40.5			30														
22	39.1			38.1			39.4			29.5			22.2											
24	35.9			35			37.5			29.1			21.6			11.5								
26	33.1			32.5			34.4			28.4			21			11.3								
28	30.6	28.7		30.3			31.9			27.3			20.4			10.9								
30		26.7		28.4	25.8		30			26.8			19.9			10.7								
32		24.7		26.6	24.2		27.8	23.6		26.2			19.5			10.3								
34		23		25	22.5		25.9	23.4		24.3			19			9.9								
36		21.5			21		24.4	21.9		22.7	21.2		18.6			9.6								
38		20.2			19.7		22.8	20.5		21.1	19.8		18.2	19.2		9.2								
40			16.6		18.5		21.4	19.2		19.7	18.7		16.9	18.1		9								
42			15.6		17.4	15	20	18.1		18.5	17.5		15.8	17		8.8	9.6							
44			14.7		17.2	14.2		16.9		17.4	16.5		14.7	16		8.6	9.2							
46			13.6		17	13.4		16	13	16.4	15.5		13.8	15		8.4	8.9							
48			12.9			12.7		15.1	12.8	15.6	14.6		12	14.2		8	8.7							
50						12.1		14.3	12.2		13.9		11.2	13.3		7.7	8.5							
52						11.7		14.1	11.6		13.1	10.9	10.7	12.6		7.3	8.3							
54						11			10.9		12.4	10.4	10.1	12	9.9	6.9	8.1							
56									10.4		11.8	9.9		11.3	9.3	6.6	7.9							
58									9.9		11.4	9.3		10.7	8.8	6.3	7.5	8						
60													8.8		10.2	8.3	5.9	7	7.1					
62													8.4		9.7	7.9	5.7	6.7	6.7					
64													8			7.5	5.5	6.4	6.4					
66													7.8			7.1		6.1	6					
68																6.7		5.8	5.7					
70																6.4		5.6	5.4					
72																		5.2	5					
74																							4.8	
76																							4.5	
78																							4.4	

LIFTING PERFORMANCE

S-boom length(m)	53																	
W-jib length(m)	27			33			39			45			51			60		
S-boom angle	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°
Radius(m)																		
14																		
16	55																	
18	49.1			48.1			41.9											
20	44.4			43.4			40.8			31.3								
22	40.3			39.4			38.8			29.8			22.1					
24	36.9			35.9			35.3			29.2			21.7			12		
26	33.8			33.1			32.5			28.6			21.1			11.4		
28	31.3			30.6			30.3			27.5			20.6			11		
30	29.4	27.8		28.6			28.1			26.9			20.1			10.7		
32	27.2	25.9		26.6	25.1		26.3			25.6			19.6			10.3		
34		24.3		25	23.4		24.4	21.6		23.9			19.1			10		
36		22.7		23.4	22		22.8	21.2		22.5	20.5		18.7			9.7		
38		21.2		22	20.7		21.6	19.9		20.9	19.3		18.3			9.4		
40		19.9			19.4		20.3	18.8		19.8	18.1		17.3	17.3		9.1		
42		19.4	15.4		18.2		19.2	17.7		18.8	17		16.1	16.4		8.9		
44			14.6		17.1		18.1	16.6		17.8	16.1		15	15.4		8.7	9.7	
46			13.8		16.2	13.1		15.6		16.9	15.4		14.1	14.6		8.5	9.3	
48			13		16	12.4		14.8	13.2	15.9	14.2		12.2	13.8		8.1	9.1	
50			12.3			11.8		14	11.2		13.5		11.3	12.9		7.7	8.9	
52						11.1		13.3	10.6		12.7	10	10.8	12.3		7.4	8.7	
54						10.6			10		12.1	9.5	10.2	11.6		6.9	8.3	
56						10.1			9.5		11.4	8.9		11	8.6	6.6	8.1	
58									9		10.9	8.5		10.4	8	6.3	7.9	
60									8.6			8.1		10	7.5	6.1	7.5	
62												7.7		9.4	7.1	5.7	7.2	6
64												7.2		9	6.7	5.5	6.7	5.6
66												6.9			6.4		6.4	5.3
68												6.5			6		6.1	4.9
70															5.7		5.9	4.6
72															5.5		5.7	4.4
74																		4.1
76																		3.9
78																		3.7
80																		3.5


S-boom length(m)	59																	
W-jib length(m)	27			33			39			45			51			60		
S-boom angle	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°
Radius(m)																		
14																		
16	51.9																	
18	46.3			45.6														
20	41.9			40.9			40			31.5								
22	38.1			37.2			36.3			30			22.4					
24	34.7			33.8			33.1			29.4			21.9			11.8		
26	31.9			31			30.6			28.8			21.3			11.6		
28	29.2			28.3			27.6			26.7			20.7			11.1		
30	26.7			25.9			25.2			25.9			20.2			10.8		
32	24.6	24.7		23.8			23.1			24.1			19.7			10.5		
34		23.1		22	22.3		21.2			22.5			19.2			10.1		
36		21.6		20.4	20.9		19.6	19.8		20.9			18			9.8		
38		20.3		18.9	19.6		18.2	18.8		19.7	17.2		16.6			9.5		
40		19.2			18.5		16.8	17.8		18.8	17		15.3	15.8		9.1		
42		18			17.4		15.6	16.8		17.5	16.1		14.1	15.4		8.9		
44			13.1		16.4		14.5	15.8		16.6	15.2		13.1	14.6		8.7	9.8	
46			12.6		15.5			15		15.8	14.3		12.1	13.7		8.5	9.7	
48			12		14.7			14.1		15	13.6		11.2	12.9		8.3	9.4	
50			11.3				10.7	13.4			12.8		10.3	12.3		7.8	9	
52			10.7				10.2		12.6	9.6		12.2		9.9	11.7		7.5	8.8
54							9.7		12	9		11.6		9.4	11		7	8.6
56							9.1			8.6		10.9	8		10.4		6.7	8.3
58							8.7			8.1		10.4	7.6		9.8	7	6.4	8.1
60										7.8		9.8	7.1		9.3	6.6	6.1	7.8
62										7.4			6.8		8.9	6.2	5.8	7.4
64										6.9			6.4		8.5	5.9	5.6	7.1
66													6.1		8	5.6	6.7	4.4
68													5.8			5.3	6.4	4.2
70													5.5			4.9	6.1	3.9
72																4.7	5.8	3.7
74																4.4	5.6	3.5
76																4.2		3.2
78																		3.1
80																		3.1
82																		3
84																		

LIFTING PERFORMANCE

S-boom length(m)	62																		
W-jib length(m)	27			33			39			45			51			60			
S-boom angle	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	85°	75°	65°	
Radius(m)																			
14																			
16	50.6																		
18	45			44.4															
20	40.6			39.7			38.8												
22	36.9			36			35.3			30.7			22.6						
24	33.8			32.8			32.2			29.4			21.9			14.8			
26	30.9			30.2			30			28.2			21.3			13.2			
28	28.8			28.1			27.5			26.5			20.7			12.7			
30	26.9			26.3			25.6			25			20.2			12.4			
32	25	26.8		24.4			23.8			23.4			19.8			12			
34		25		22.8	24.4		22.2			21.9			19.3			11.7			
36		23.1		21.4	22.5		20.9	22.2		20.3			18.8			11.3			
38		21.6		20.2	21.1		19.7	20.6		19.1	20.3		18.4			11			
40		20.3			20		18.4	19.5		17.9	19.2		17.5			10.7			
42		19.4			19.1		17.5	18.2		17	18.1		16.6	17.5		10.5			
44		18.4			18.1		16.6	17.1		16	16.9		15.6	16.4		10.3			
46			14.7		17.2			16		15.2	16		14.8	15.6		10	11.4		
48			14.3		16.3	13.2		15.2		14.6	15.3		13.9	15		9.6	11		
50			13.4		15.5	12.6		14.6		14.1	14.5		11.7	14.4		9.1	10.8		
52			12.8			12.1		14.2	11.5		13.8		11.1	13.8		8.6	10.5		
54			12.2			11.5		13.8	10.9		13.2		10.5	13.1		8.1	10.3		
56			11.8			10.9		13.1	10.3		12.6	10.3	10	12.5		7.7	10		
58						10.3			9.8		12.2	9.7		11.9		7.2	9.8		
60						9.8			9.5		11.9	9.4		11.3		6.8	9.4		
62									8.9			8.8		10.6	8.4	6.2	8.8		
64									8.6			8.4		10.3	7.8	6.2	8.4	6.9	
66												8.1		10	7.5		7.9	6.6	
68												7.8			7.2		7.5	6.3	
70												7.2			6.6		7.1	6	
72												6.9			6.3		6.7	5.7	
74															5.9		6.3	5.5	
76															5.8		6	5.2	
78															5.6			4.9	
80															5.3			4.6	
82																		4.5	
84																		4.3	

LIFTING PERFORMANCE

Lifting performance on SFV boom

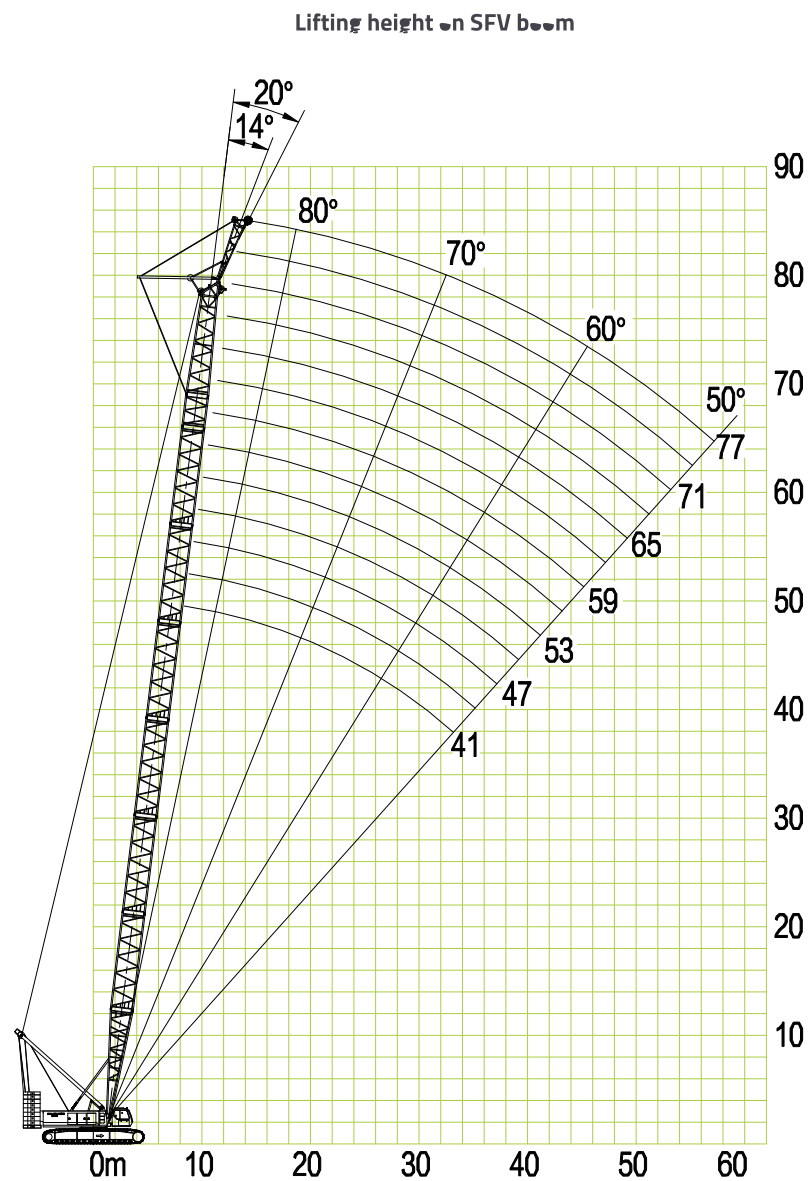

LIFTING PERFORMANCE

S-boom length (m)								
Radius (m)	41		44		47		50	
	FV-jib angle (°)							
	14	20	14	20	14	20	14	20
10	60.0	56.9	60.0	56.9/11	60.0/11	56.9/11		
12	60.0	54.7	60.0	54.7	60.0	54.7	60.0/11	
14	60.0	50.3	60.0	52.5	60.0	52.5	60	56.9
16	58	48.1	59.1	48.1	60.0	50.3	60	52.5
18	54.7	45.9	56.9	45.9	56.9	48.1	60	50.3
20	51.4	43.8	52.4	43.8	51.9	45.9	58	48.1
22	47.2	41.6	46.7	42.7	46.1	43.8	51.2	45.9
24	42	39.4	41.9	41.6	41.5	41.6	45.6	43.8
26	37.8	37.8	37.7	37.7	37.4	37.5	40.9	41.1
28	34.1	34.2	34.1	34.1	33.8	34	37	37.1
30	31.1	31.1	31	31.1	30.8	30.8	33.6	33.7
32	28.5	28.5	28.4	28.4	28.1	28.2	30.6	30.6
34	27.3/33	27.3/33	26	26	25.8	25.9	27.8	28
36			25/35	25/35	23.9	23.9	25.5	25.6
38					22.9/37	22.9/37	23.6	23.6
40							21.7/39	21.8/39
42								

CAUTION:

- 1.The lifting capacity is given in metric tons, and the sign ‘*/’ indicates ‘lifting capacity / radius’. The values in grey are determined by boom strength, while the rest values are determined by crane stability.
- 2.For SFV boom configuration, S-boom angle = 50° – 83°, FV-jib angle = 14° or 20°, and FV-jib length = 6 m.

S-boom length (m)								
Radius (m)	53		56		59		62	
	FV-jib angle(°)							
	14	20	14	20	14	20	14	20
11	60.0							
12	60.0	56.9	60.0	56.9	60.0	56.9/13	60.0	56.9/13
14	60.0	54.7	60.0	54.7	60.0	54.7	60.0	55.8
16	60.0	51.4	60.0	52.5	59.1	52.5	56.9	52.5
18	57.4	49.2	56.9	50.3	55.8	50.3	53.6	50.3
20	51.2	47	50.3	48.1	49.2	48.1	48.1	49.2
22	45.6	44.8	44.8	44.8	43.8	43.8	43.2	43.8
24	40.9	41.1	40.4	40.5	39.9	40	39.4	39.4
26	37	37.1	36.6	36.7	36	36.1	35	35.5
28	33.4	33.4	33.2	33.3	32.7	32.8	31.7	32.3
30	30.3	30.4	30.1	30.1	29.5	29.9	29.5	29.5
32	27.7	27.7	27.4	27.5	27.1	27.3	27	27
34	25.4	25.4	25.1	25.2	24.8	25	24.7	24.7
36	23.3	23.4	23.2	23.2	22.8	22.9	22.6	22.6
38	21.5	21.5	21.3	21.4	21	21.1	20.8	20.8
40	19.9	19.9	19.8	19.8	19.5	19.5	19.2	19.2
42	19.2/41	19.2/41	18.3	18.3	18	18	17.7	17.8
44			17.6/43	17.6/43	16.6	16.7	16.5	16.5
46					16.1/45	16.1/45	15.2	15.2
48							14.7/47	14.7/47
50								

LIFTING PERFORMANCE

S-boom length (m)								
Radius (m)	65		68		71		74	
	FV-jib angle(°)							
	14	20	14	20	14	20	14	20
13	55.2	54.1	49.2		44.6			
14	55	53.9	48.7	47.9	42.4	41.6	38	37.2
16	53.9	53	47.6	46.8	41.6	41	37.1	36.5
18	50.9	50.3	46.8	45.9	40.5	39.9	36.4	35.8
20	48.1	47.6	45.7	45.1	39.6	39.1	35.3	35
22	42.7	42.7	41.6	42.7	38.8	38.3	34.3	33.9
24	38.3	38.3	37.2	37.7	37.2	37.2	33.5	33.1
26	35	35	33.9	33.9	33.4	33.4	32.7	32.4
28	31.7	31.7	30.6	30.6	30.1	30.1	29.5	29.5
30	28.4	28.4	28.2	28.2	27.9	27.9	27.3	27.3
32	26.3	26.8	25.7	26.3	25.2	25.2	24.6	24.6
34	24.1	24.5	23.5	23.5	23	23	22.4	22.4
36	22.4	22.4	21.9	21.9	21.3	21.3	20.8	20.8
38	20.6	20.7	19.7	19.7	19.1	19.7	18.6	19.1
40	18.9	19.1	18	18.6	18	18	17.5	17.5
42	17.5	17.5	17	17	16.4	16.4	15.9	15.9
44	16.2	16.2	15.3	15.6	15.3	15.3	14.8	14.8
46	15	15	14.2	14.2	13.7	13.9	13.4	13.7
48	13.9	13.9	13.4	13.4	13.1	13.1	12.6	12.6
50		13.4/49	12.6	12.6	12	12	11.5	11.5
52				12/51	11.2	11.2	10.7	10.9
54						10.9/53	9.8	9.8
56								9.3/55
58								

Radius (m)	S-boom length (m)	
	77	
	FV-jib angle(°)	
	14	20
14	33.6	32.5/15
16	32.9	32.4
18	32.3	31.7
20	31.3	30.9
22	30.6	30.2
24	29.7	29.4
26	28.7	28.4
28	26.9	26.7
30	26.3	26
32	24.1	24.1
34	21.9	21.9
36	19.7	20.2
38	18	18.6
40	17	17
42	15.3	15.3
44	14.2	14.2
46	13.1	13.1
48	12	12
50	10.9	10.9
52	10.4	10.4
54	9.3	9.3
56	8.5	8.5
58		

ZOOMLION

Zoomlion Heavy Industry Science & Technology Co.,Ltd.

Add: No.677, Lugu Road, Zoomlion Industrial Park, Changsha, Hunan, China, 410205

Copyright©2017 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.

